
Type EI 38/13,6 3,2 VA

Range available ex stock*

VDE 0551/EN 60742
Potted under vacuum
Split-bobbin transformers
Temperature class t_a 60° C/E

* Other primary and secondary voltages on request
* Other temperature classes on request
* CCA-Certificate available
* Weight 0,155 kg

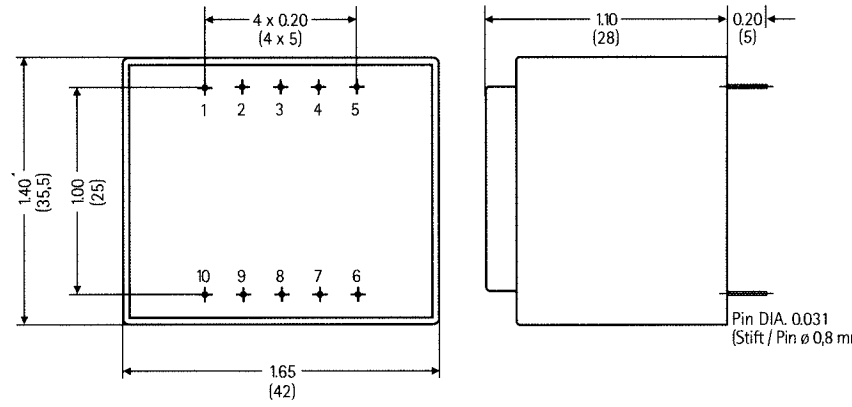

View of pins
Dimensions in Inches
Millimeter equivalents in parentheses

	Primary	Pin	Secondary	No-Load Voltage	Pin	Empty-Pin	Types Ref. No.	Approvals
	230 V	1-5	6 V 534 mA	9,20 V	7-9	6/10	BV 038-5187.0 F	1 · 2 · 3 · 4 · 5 · 10
RS 207-5309	230 V	1-5	9 V 356 mA	13,95 V	7-9	6/10	BV 038-5190.0 F	1 · 2 · 3 · 4 · 5 · 10
RS 207-5315	230 V	1-5	12 V 267 mA	17,80 V	7-9	6/10	BV 038-5193.0 F	1 · 2 · 3 · 4 · 5 · 10
RS 207-5337	230 V	1-5	15 V 214 mA	22,20 V	7-9	6/10	BV 038-5196.0 F	1 · 2 · 3 · 4 · 5 · 10
RS 207-5343	230 V	1-5	18 V 178 mA	27,00 V	7-9	6/10	BV 038-5199.0 F	1 · 2 · 3 · 4 · 5 · 10
RS 207-5359	230 V	1-5	24 V 134 mA	35,00 V	7-9	6/10	BV 038-5205.0 F	1 · 2 · 3 · 4 · 5 · 10
	230 V	1-5	2 x 6 V 267 mA	2 x 8,90 V	6-7/9-10		BV 038-5210.0 F	1 · 2 · 3 · 4 · 5 · 10
	230 V	1-5	2 x 9 V 178 mA	2 x 13,40 V	6-7/9-10		BV 038-5213.0 F	1 · 2 · 3 · 4 · 5 · 10
	230 V	1-5	2 x 12 V 134 mA	2 x 17,50 V	6-7/9-10		BV 038-5216.0 F	1 · 2 · 3 · 4 · 5 · 10
	230 V	1-5	2 x 15 V 107 mA	2 x 22,30 V	6-7/9-10		BV 038-5219.0 F	1 · 2 · 3 · 4 · 5 · 10
	230 V	1-5	2 x 18 V 89 mA	2 x 25,80 V	6-7/9-10		BV 038-5222.0	2 · 3 10
	230 V	1-5	2 x 24 V 67 mA	2 x 35,90 V	6-7/9-10		BV 038-5228.0	2 · 3 10

Specifications subject to change without notice.

Approval symbol 1 2 3 4 5 6 7 8 9 10

- the market leader in Europe